


# JIC 37° Flare (SAE J514)

Female / Swivel

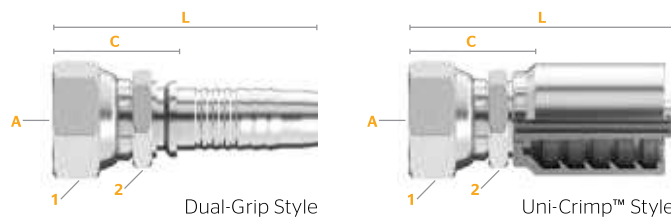

## Uni-Crimp™ Style

Part Number	Product Number	SAP Number	Hose ID	Thread Size (A)	Hex 1 Wrench Size		Hex 2 Wrench Size		Cut-Off (C)		Length (L)		Skive Type*
					in.	mm	in.	mm	in.	mm	in.	mm	
S6-JCFX-2424	30400-2424	20241922	1 ½	1 7/8-12	2 3/8	55	2	50	1.94	49.4	5.94	151.0	NS
S6-JCFX-3232	30400-3232	20242040	2	2 ½ -12	2 13/16	70	2 9/16	70	2.58	65.5	6.51	165.4	NS

\*NS=Non-Skive


## Dual-Grip Style

Part Number	Product Number	SAP Number	Hose ID	Thread Size (A)	Hex 1 Wrench Size		Hex 2 Wrench Size		Cut-Off (C)		Length (L)		Skive Type*
					in.	mm	in.	mm	in.	mm	in.	mm	
DG-JCFX-2424 <sup>T1</sup>	16400-2424	20242432	1 ½	1 7/8-12	2 3/8	55			1.14	29.0	5.47	139.0	DG
DG-JCFX-3232 <sup>T1</sup>	16400-3232	20254272	2	2 ½ -12	2 13/16	70			1.34	34.0	6.10	155.0	DG

T=Thrust-Wire Nut 1=Single Hex (See Fitting Identification in Appendix for more information.) \*DG=Dual-Grip

# JIC 37° Flare (SAE J514)

Female / 45° Elbow / Swivel



Part Number	Product Number	SAP Number	Hose ID	Thread Size (A)	Hex 1 Wrench Size		Drop (D)	Cut-Off (C)		Length (L)		Skive Type*	
					in.	mm		in.	mm	in.	mm		
S6-JCFX45-2424	30420-2424	20424976	1 ½	1 7/8-12	2 3/8	55	1.71	43.5	4.65	118.0	8.64	219.5	NS
S6-JCFX45-3232	30420-3232	20788106	2	2 ½ -12	2 13/16	70	2.76	70.1	6.54	166.1	10.47	266.7	NS


\*NS=Non-Skive



Download the **MyCrimp App** for more information.

## Section 3 S6 + DG Fittings

## FITTINGS

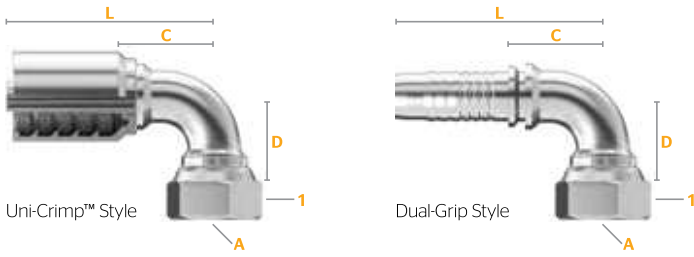

## JIC 37° Flare (SAE J514)

Female / 90° Elbow / Swivel

### Uni-Crimp™ Style


Part Number	Product Number	SAP Number	Hose ID	Thread Size (A)	Hex 1 Wrench Size		Drop (D)		Cut-Off (C)		Length (L)		Skive Type*
					in.	mm	in.	mm	in.	mm	in.	mm	
S6-JCFX90-2424	30425-2424	20241905	1 1/2	1 1/8-12	2 3/16	55	3.62	92.0	4.13	105.0	7.40	188.0	NS
S6-JCFX90-3232	30425-3232	20788107	2	2 1/2-12	2 13/16	70	5.51	140.2	5.71	145.0	9.64	244.9	NS

\*NS=Non-Skive

### Dual-Grip Style

Part Number	Product Number	SAP Number	Hose ID	Thread Size (A)	Hex 1 Wrench Size		Drop (D)		Cut-Off (C)		Length (L)		Skive Type*
					in.	mm	in.	mm	in.	mm	in.	mm	
DG-JCFX90-2424 <sup>T</sup>	16425-2424	20254277	1 1/2	1 1/8-12	2 3/16	55	3.62	92.0	3.70	94.0	7.28	185.0	DG

T=Thrust-Wire Nut (See Fitting Identification in Appendix for more information.) \*DG=Dual-Grip

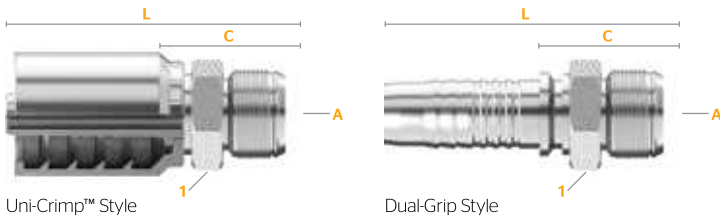

## JIC 37° Flare (SAE J514)

Male

### Uni-Crimp™ Style

Part Number	Product Number	SAP Number	Hose ID	Thread Size (A)	Hex 1 Wrench Size		Cut-Off (C)		Length (L)		Skive Type*
					in.	mm	in.	mm	in.	mm	
S6-JCM-2424	30450-2424	20424981	1 1/2	1 1/8-12	2	50	2.26	57.5	5.53	140.5	NS
S6-JCM-3232	30450-3232	20788108	2	2 1/2-12	2 13/16	70	2.83	71.8	6.76	171.6	NS

\*NS=Non-Skive

### Dual-Grip Style

Part Number	Product Number	SAP Number	Hose ID	Thread Size (A)	Hex 1 Wrench Size		Cut-Off (C)		Length (L)		Skive Type*
					in.	mm	in.	mm	in.	mm	
DG-JCM-2424	16450-2424	20242352	1 1/2	1 1/8-12	2	50	1.54	39.0	5.57	141.5	DG

\*DG=Dual-Grip

## FITTINGS



## Section 3 S6 + DG Fittings

### COMPATIBLE HOSE:

SR13	SR15	S4SP
ARC13	ARC15	S4SH

For a detailed list, please refer to your Crimp Specifications Manual.